


Deep Pleated HEPA Filters

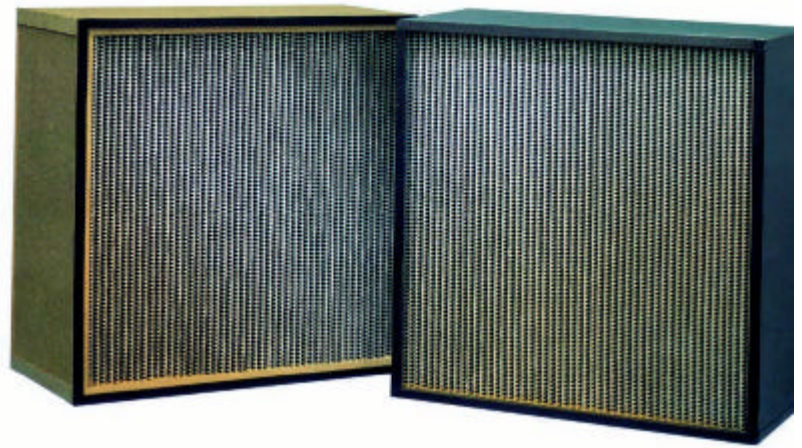

The Deep Pleated HEPA Filter provides the solution to the requirement for low replacement cost HEPA Filtration using conventional construction methods

The product is suitable for use in turbulent HEPA filtration applications. The timber version being fully incinerable this model is particularly suited for applications where this form of disposal of the spent filter is anticipated, Hospital, bacteriological, toxicological etc.

Construction

The product is manufactured using high quality micro-glass paper combined with corrugated Aluminium safety edged separators. The filter pack is bonded into the filter to form an extended media surface area. The physical stability of the product is enhanced by it's outer casing manufactured from either Galvanised steel or MDF. The finished product is fitted with a continuous elastomer sealing gasket on the clean air side of the filter. On completion of production each cell is tested to ensure optimum performance.

Packaging is in outer double wall protective cartons, internal face protection & removal boards and polythene bag.

Applications

The deep Pleated Hepa is suitable for use where conventional air velocities are used

Range

This product is available in a large range of standard sizes, please find below some typical values for our most popular items:

Reference	Dimensions			Construction	Rated Airflow (m3/hr)	Initial Pressure Drop (pa)
	Height (mm)	Width (mm)	Depth (mm)			
Deep Pleated Hepa 24x24x6"W	610	610	150	MDF	850	250
Deep Pleated Hepa 24x24x12"W	610	610	292	MDF	1700	250
Deep Pleated Hepa 24x24x6"M	610	610	150	Galv Steel	850	250
Deep Pleated Hepa 24x24x12"M	610	610	292	Galv Steel	1700	250

Recommended Final Resistance

500pa

Maximum Resistance 1000pa

Maximum Humidity

100%RH – Galv

80%RH – MDF

Max Operating Temperature

100°C – Galv

80°C - MDF

In order to retain their efficiency characteristics these filters must not exceed their rated airflow capacity.

Please Note: In their continuous search for product improvement Dustop Ltd reserve the right to change materials and specifications without prior notice.

dustop
Ltd.



2 Clemsford Farm, Guildford Road,
Broadbridge Heath, Horsham. RH12 3PW
Tel: 01403 790782 Fax: 01403 791079
Website: dustop.com email: mail@dustop.com